

Product introduction

JISIM JD2118X is a constant current LED intelligent dimmable driver specifically designed for built in driver luminaires. It supports 0/1-10V PWM RX dimming functions. The customized dimming curve provides a more comfortable viewing experience for the human eye. When not connected to an external signal, it can be used as a non-dimmable driver and supports a gradual start-up effect. It is suitable for surface mounted downlights, spotlights, track lights, wall lights. Paired with various intelligent control systems, it is widely used in smart homes, smart hotels, intelligent commercial spaces, smart offices, smart buildings, and other facilities.



Product Features

- Compact SELV built in Dimmable Driver
- Support 0/1-10V PWM RX dimming
- Glue filling process, Global Certification
- Suitable for Class I / II / III indoor light fixtures
- Smooth dimming, flicker-free, dimming range: 0.5-100%
- Up to 30000 hours life time, 3-Year Warranty (Long-lasting Capacitor)
- Max. output power 14W
- Small size and light weight, High power factor, High Efficiency, Low THD
- The housing is made from V0 flame retardant PC materials from CHIMEI

Technical Specifications (All parameters not specially mentioned are measured at 230VAC input, full load and 25°C of ambient temperature)

Model	JD2118X (See the following table)			Output Type	Constant Current	
Input	DC Voltage Range	100-240V		Dimming Interface	1-CH 0-10V/1-10V_RX_PWM	
	AC Voltage Range	100-240V		Output Feature	Isolation	
	Rated Voltage	220Vac/230Vac/240Vac		IP Rating	IP20	
	Input Frequency	50/60Hz		Insulation Rating	Class II (Suitable for class I II III light fixtures)	
	Input Current	≤0.2A/100Vac(at full load) ≤0.09A/230Vac(at full load)		No Load Output Voltage	≤59Vdc	
	Input Power	Max.17W		Output Voltage Range	9-40Vdc	
	Power Factor	PF>0.9C/230Vac(at full load) PF>0.95C/110Vac(at full load)		Output Current Range	100-350mA	
	THD	THD<10%/230Vac(at full load)		Output Power Range	0.9-14W	
	Efficiency	≥84%(at full load)		Dimming Range	0.5-100%	
	Inrush Current	Cold start 15A(Test twidth=102us under 50% Ipeak@230Vac)		Ripple Current	<5%	
Anti-Surge	L-N:1KV		Current Accuracy	±5%		
Leakage Current	<0.5mA/230Vac		PWM Frequency	1500Hz		
Protection	Overload Protection	Hiccup Mode (Auto-Recovery after Elimination)		Working Temperature	ta:-20°C~60°C	
	Open Circuit Protection	≤59Vdc		Working Humidity	20~95%RH(No Condensation)	
	Short Circuit Protection	Hiccup Mode (Auto-Recovery after Elimination)		Storage Temperature/Humidity	-20~85°C/10~95%RH	
Safety & EMC	Withstand Voltage	I/P-O/P: 3750Vac, 5mA, 60s			Case Temperature	tc:90°C
	Insulation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH			Life Time	>30000h@tc=90°C
	Safety Standards	CCC	China	GB19510.1, GB19510.14		
		CE	European Union	EN61347-1, EN61347-2-13, EN62493		
		KC	Korea	KC61347-1, KC61347-2-13		
		TUV	Germany	EN61347-1, EN61347-2-13, EN62493		
		ENEC	Europe	EN61347-1, EN61347-2-13, EN IEC62384		
		CB	CB Member States	IEC61347-1, IEC61347-2-13		
		RCM	Australia	AS/NZS61347.1, AS61347.2.13		
		BIS	India	IS15885(PART2/SEC13)		
	EMC Emission	EAC	Russia	IEC61347-1, IEC61347-2-13		
		UKCA	United Kingdom	BS EN61347-1, BS EN IEC61347-2-13, BS EN62493		
		CCC	China	GB/T17743, GB17625.1		
		CE	European Union	EN IEC55015, EN IEC61000-3-2, EN61000-3-3		
		KC	Korea	KSC9815, KSC9547		
RCM		Australia	EN IEC55015, EN IEC61000-3-2, EN61000-3-3			
UKCA		United Kingdom	BS EN IEC55015, BS EN IEC6100-3-2, BS EN61000-3-3			
EMC Immunity	EAC	Russia	IEC62493.IEC61547, EN55015.IEC61000-3-2, IEC61000-3-3			
	BIS	India	IS15885(PART2/SEC13)			
ErP	Flicker/ Stroboscopic Effect	IEEE1789	Meet IEEE Std1789-2015			
		CIESVM	Pst≤1, SVM≤0.4			
	DF	Phase Factor	DF≥0.9			
Test Equipment	AC Source	PS-61005	Withstand Voltage Tester	TH9302D	Other	
	DC Electronic Load	IT8512A+	Thermostatic Humidity Chamber	HT-H-802		
	Spectrum Analyzer	KH3932	Intelligent Electrical Parameter Meter	PF9800	LED Load	
	Surge Generator	SUG61005TB(7.5KV)-2216	Oscilloscope	TBS1102B		
	Stroboscope	LANSHU-201B	Digital Wattmeter	PM2818C		


0/1-10V PWM RX Dimmable LED Driver

Model/parameter comparison table


Model	JD2118	JD2118A	JD2118B	JD2118C	JD2118D	JD2118E	JD2118F	JD2118G	JD2118H	JD2118K
Output Power	Max.14W	Max.12.8W	Max.12W	Max.10.8W	Max.10W	Max.8W	Max.7.2W	Max.6W	Max.4.8W	Max.4W
Output Current	350mA	320mA	300mA	270mA	250mA	200mA	180mA	150mA	120mA	100mA

2D Diagram

Length (L)	Width (D)	Heigh(H)	Weight(W)
53mm	42mm	23mm	91.5±10g

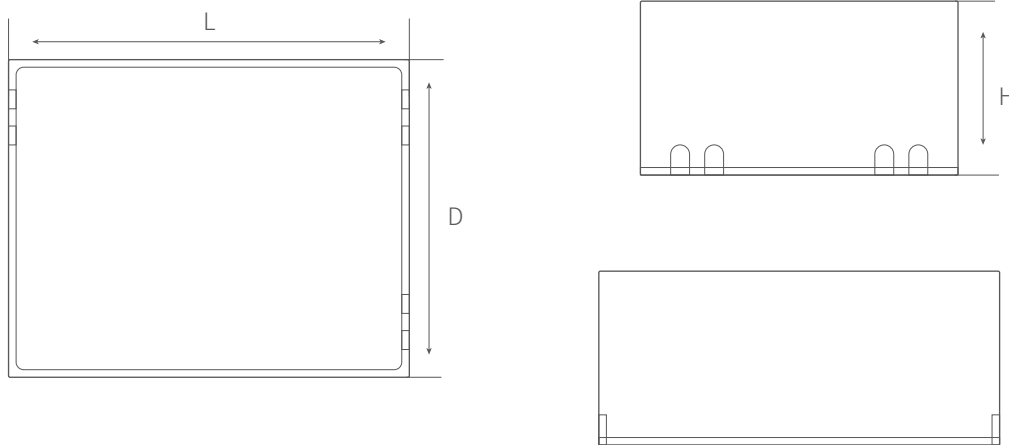

Wiring Diagram

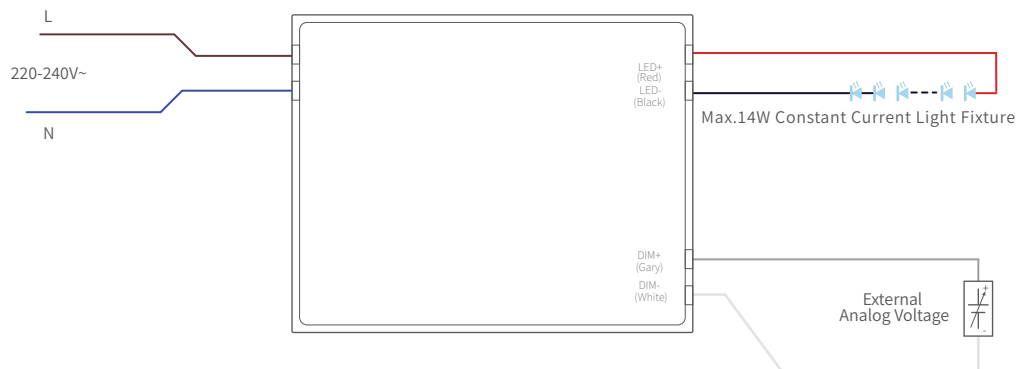


◦ Explanation of 0/1-10V Interface Signals ◦

◀ The DIM+ terminal is used to adjust brightness:

When the voltage at the DIM+ terminal is adjusted within the range of 0/1-10V, the brightness changes from 0 to 100%.The light turns on/off at a voltage value of $1.1 \pm 0.05V$.


When DIM+ terminals is left floating (unconnected), the default output is 100% Brightness.

0/1-10V PWM RX Dimmable LED Driver

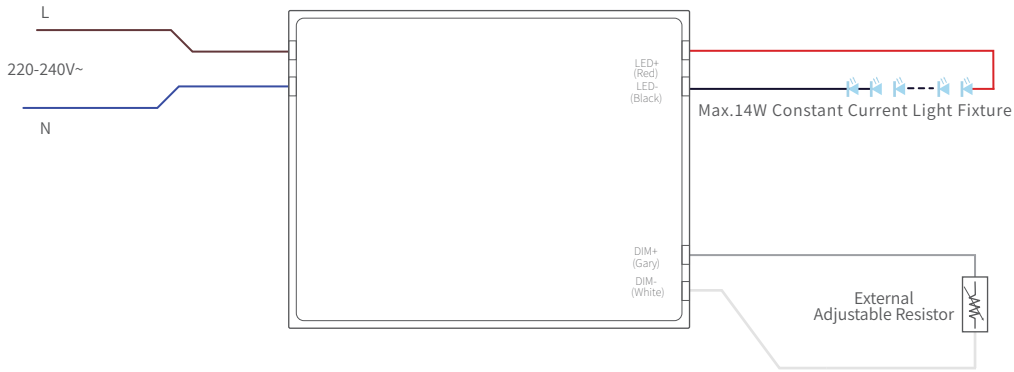

Potentiometer (Rx) Interface Signal Description

- ◀ The DIM+ terminal is used for adjusting brightness:
 - When the resistance value at the DIM+ terminal is adjusted within 0-100KΩ, the brightness changes from 0 to 100%. Specifically, a resistance value of $3K\Omega \pm 1K\Omega$ triggers the light to turn on/off.
 - When DIM+ terminals is left floating (unconnected), the default output is 100% Brightness.

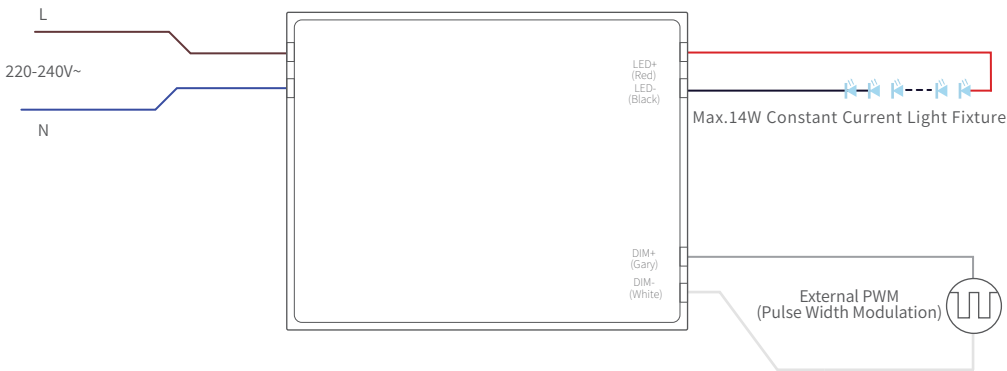

PWM Interface Signal Description

- ◀ The DIM+ terminal is used for adjusting brightness:
 - When the 10V PWM signal at the DIM+ terminal is adjusted from 0 to 100%, the brightness changes correspondingly from 0 to 100%.
 - When DIM+ terminals is left floating (unconnected), the default output is 100% cool Brightness.


Installation Instructions

Interface	Marking	Description
Input	L	Input terminal of AC live wire
	N	Input terminal of AC neutral wire
Output	LED+	Positive electrode output of the driver
	LED-	Negative electrode output of the driver
Signal	DIM+	Positive electrode input 0-10V/PWM/RX dimming
	DIM-	Negative electrode input 0-10V/PWM/RX dimming



Connection instructions

1. Check the color of the interface and cable carefully before wiring.
2. All connections must be as short as possible to ensure good EMI performance.
3. No secondary switches are allowed.
4. The driver output does not support hot swap
5. Incorrect wiring can damage the LED.

Product Characteristic Curves

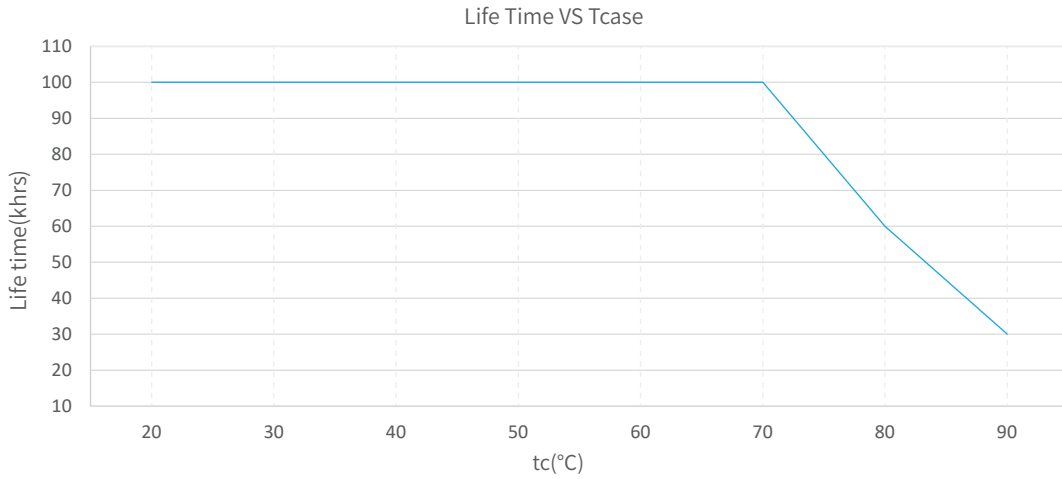


The life-time of the LED driver is shown in the figure above calculated (based on the 90% survival rate). The relation of tc to ta temperature depends also on the luminaire design.

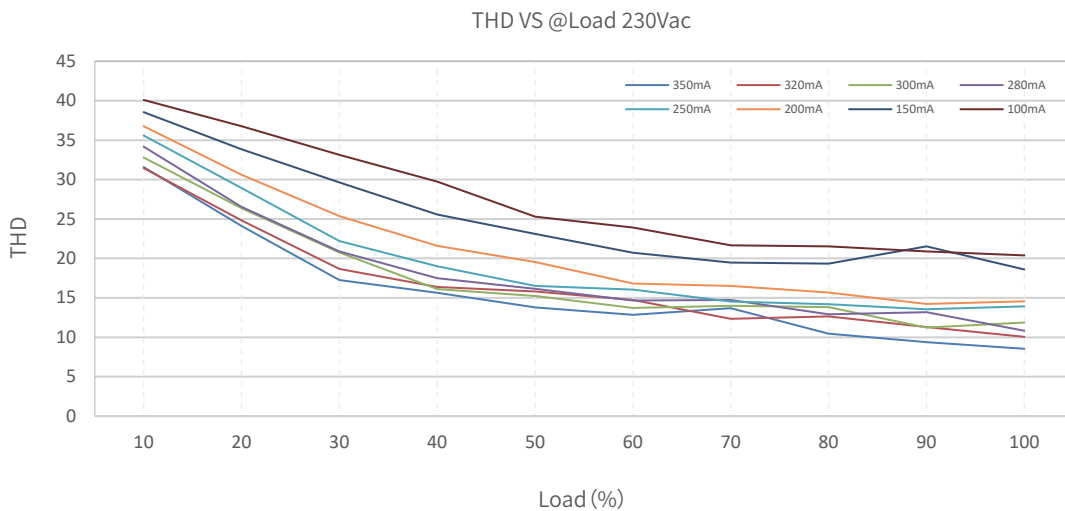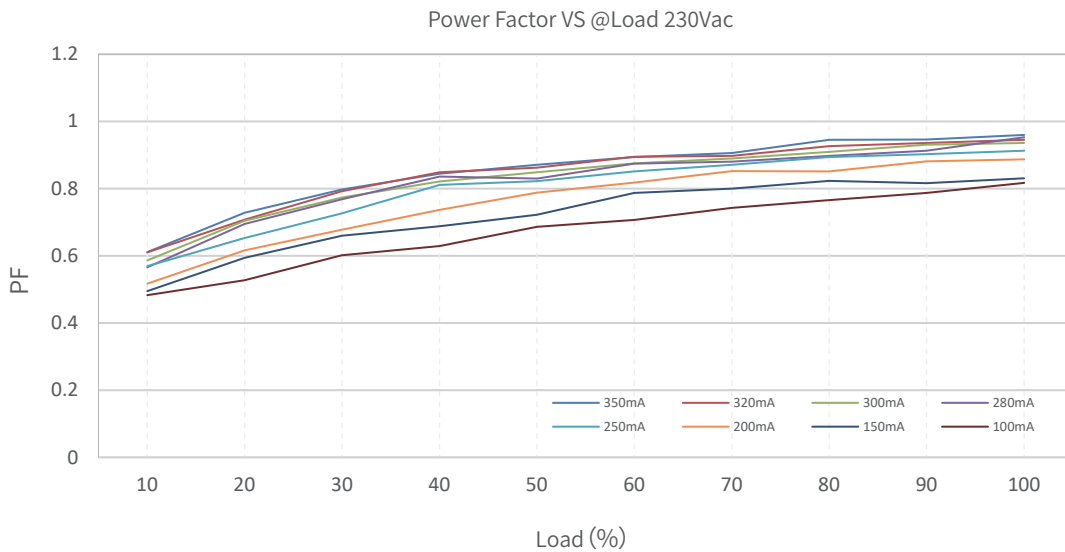

0/1-10V PWM RX Dimmable LED Driver

Efficiency VS Load@230Vac

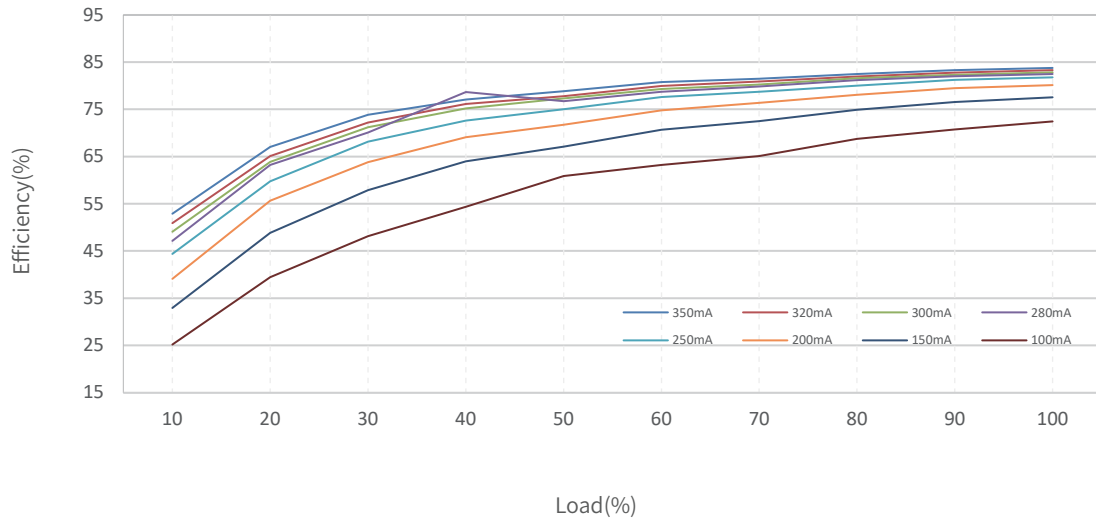

Packaging Image



Packaging Size

Packaging Details	Carton Size	Packing Units	Weight
Inner Packaging Box	69 x 65 x 30.5mm	1pcs	105.3±10g
Small Carton Packaging	350 x 197 x 167mm	64pcs	7.03kg
Large Carton Packaging	420 x 360 x 365mm	256pcs	29.1kg

Packaging instructions:

Each large carton packaging contains 4 small carton packagings, Each small carton packaging contains 64 inner packaging boxes.

0/1-10V PWM RX Dimmable LED Driver

Cautions

- ▶ This product is used as a component in conjunction with a lighting fixture. Due to the influence of EMC from the lighting fixture and wiring, customers should perform EMC testing to confirm the entire product set.
- ▶ No operation with power on. Installation and debugging should be performed by qualified professionals. Please read the product manual carefully before installation.
- ▶ This product can be installed inside the luminaire for use, but the internal temperature of the luminaire must be strictly controlled to not exceed 60°C. Exceeding this temperature may adversely affect the service life of the luminaire.
- ▶ This product is not waterproof and should be avoided from direct sunlight and rain. If it is installed outdoors, please use a waterproof case.
- ▶ Good heat dissipation conditions are beneficial to the product's lifetime. Please install the product in a suitable environment, and strictly prohibit using double-sided tape to attach the casing or circuit board.
- ▶ Please check the parameters of the LED driver to ensure they meet the application requirements of the lighting fixture.
- ▶ Please install according to the standard wire gauge specified in the manual to avoid malfunctions caused by inappropriate wiring.
- ▶ Before powering on, please ensure that the wiring is correct to prevent damage to the driver or lighting fixture caused by incorrect wiring.
- ▶ If a malfunction occurs, please do not attempt to repair it yourself, if you have any questions, please contact the manufacturer.
- ▶ The manual is for reference only. Please refer to the actual product. Any changes to this product will not be notified separately.
- ▶ For more information, please send an email to fei.l@jisim-tech.com.

Warranty Terms

- ▶ The product is warranted for 3 years. (The life and MTBF of the product are for reference only, and do not represent a warranty statement.)
- ▶ During the warranty period, if any quality issues arise, JISIM will provide free repair or replacement services.

Non-Warranty Terms

The following situations are not covered by the free warranty or replacement service:

- ▶ The warranty period has expired.
- ▶ Damage caused by human factors such as overvoltage, overload, or improper operation.
- ▶ Deformation or damage to the exterior appearance.
- ▶ Damage caused by natural disasters or other irresistible human factors.
- ▶ The warranty label has been torn off or removed.
- ▶ No contract or invoice proof is provided.



Notice:

1. Repair or replacement provided is the only remedy for customers. JISIM is not liable for any incidental or consequential damage unless it is within the law.
2. JISIM has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.